



# EasyGate IM

## Type

Swing technology  
1 wing / 2 wings  
Square front

## Safety & Security Detection

36 pairs of IR sensors  
Adjustable Safety & Security levels  
Tailgating / Cross over detection

## Dimensions

Cabinet height	39.17"	995 mm
Cabinet length	59.10"	1 500 mm
Barrier height standard	47.24"	1200 mm
Barrier height max.	70.87"	1800 mm
Passage width standard[1]	25.59"	650 mm
Passage width max.[1]	36.22"	920 mm

## Special features\*

Wide passage lane[2]	36.22-41.34"	921-1050 mm
Heavy duty wing		
Arc layout		
Staggered / diagonal layout		




EasyGate IM / 39" 990 mm



EasyGate IM / 70.9" 1 800 mm

\* Optional [1] For 2 wings type [2] Dual opening mode

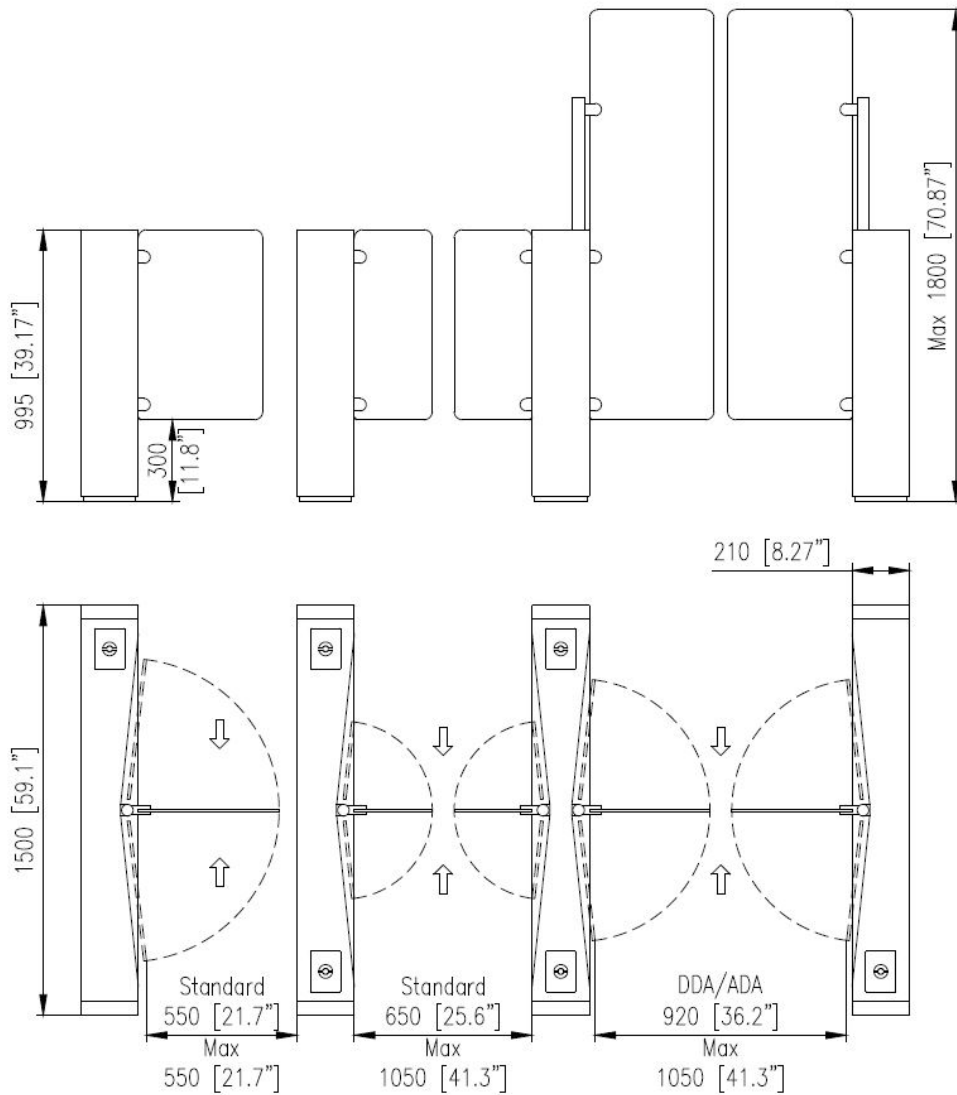

### Operating Environment

Indoor

### Drive Mechanism

Magnetic Direct Drive motor with external tooth brake

MCBF 25,000,000

### Power Supply

110 AC, 60 Hz

### Emergency Mode

Open automatically in the exit direction

Push through feature\*

### Optional Accessories

- RFID reader bracket (flush mounted)
- Access Light / Lane Light / Wing Light
- WAV player
- Hinge capping
- Push through feature
- RF remote control
- EasyTouch / TouchPanel / T-MON SW
- SuperCap (emergency power back-up)
- Alternative surface finishes / Optional top finishes
- Integration of LiftCall / Card collector / BarCode scanner
- Surface Mounting Bases

### Material and Colours

Inner covers	brushed stainless steel	
Cladding	corian	
Barriers	tempered glass barrier panels	(0.39"/10mm)
Side infill panel	tempered glass panels	(0.24"/6mm)

