

EasyGate LC

Type

Swing technology
1 wing / 2 wings
Square front

Safety & Security Detection

36 pairs of IR sensors
Adjustable Safety & Security levels
Tailgating / Cross over detection

Dimensions

Cabinet height	38.98"	990 mm
Cabinet length	55.12"	1400 mm
Cabinet Width	5.90"	150mm
Barrier height standard	38.98"	990 mm
Barrier height max.	70.87"	1800 mm
Passage width standard[1]	25.59"	650 mm
Passage width max.[1]	36.22"	920 mm

Special features*

Wide passage lane[2] 36.22-41.34" 921-1050 mm
Arc layout
Staggered / diagonal layout




EasyGate LC / 39" 990 mm



EasyGate LC / 70.9" 1 800 mm

* Optional [1] For 2 wings type [2] Dual opening mode

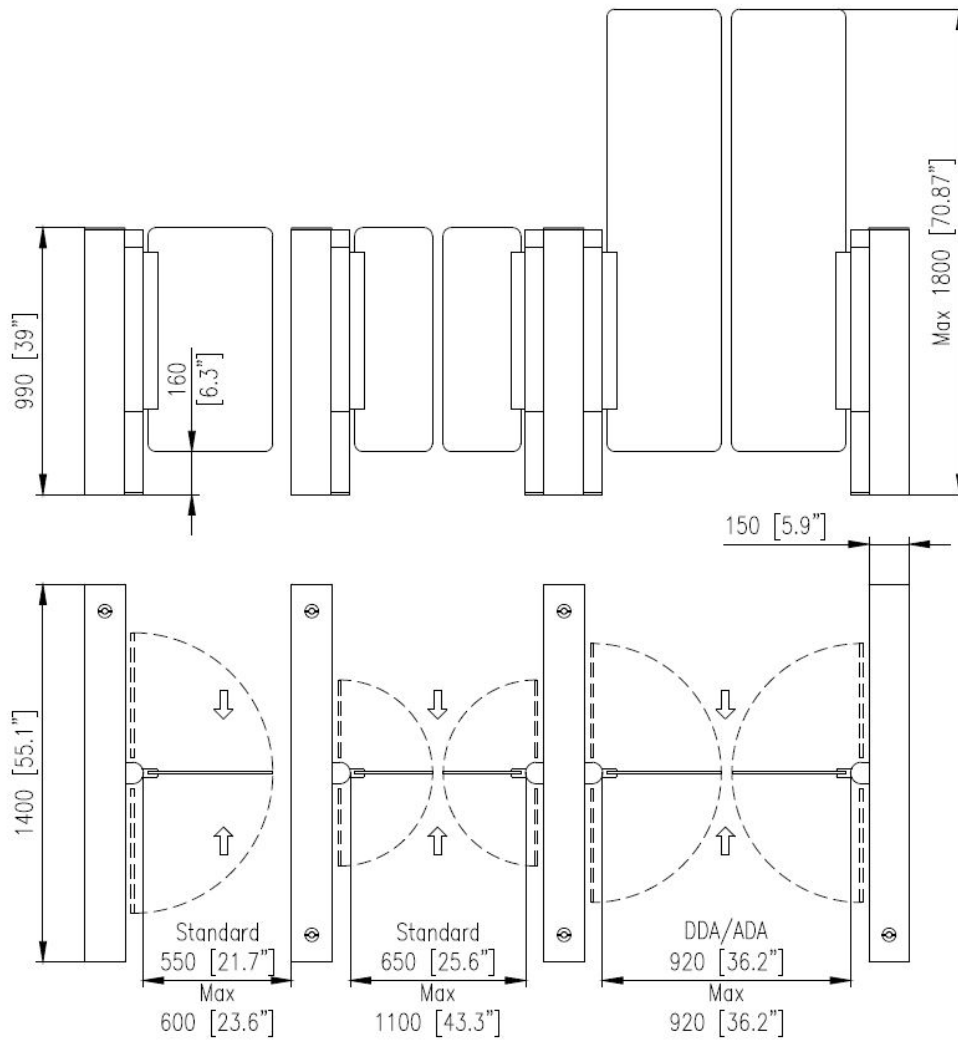

Operating Environment

Indoor

Drive Mechanism

Fail Safe

MCBF 5,000,000

Power Supply

110 AC, 60 Hz

Emergency Mode

Open automatically in the exit direction

Push through feature*

Optional Accessories

- RFID reader bracket (flush mounted)
- Access Light / Lane Light / Wing Light
- WAV player
- Hinge capping
- Push through feature
- RF remote control
- Pressure sensitive tops
- EasyTouch / TouchPanel / T-MON SW
- SuperCap (emergency power back-up)
- Alternative surface finishes / Optional top finishes
- Integration of LiftCall / Card collector / BarCode scanner
- Surface Mounting Bases

Material and Colours

Covers	brushed stainless steel/ glass on back and front
Top Lid	black glass
Barriers	tempered glass barrier panels (0.39"/10mm)
Side infill panel	brushed stainless steel

