



## EasyGate SPTs-G / SPTs-R

### Type

Swing technology

1 wing / 2 wings

SPTs-G model - round front

SPTs-R model - square front

### Safety & Security Detection

24 pairs of IR sensors

Safety & Security levels

Tailgating / Cross over detection

### Dimensions

Cabinet height	990 mm	38.39"
Cabinet length	1 200 mm	47.24"
Barrier height standard	990 mm	38.98"
Barrier height max.	1 800 mm	70.87"
Passage width standard <sup>[1]</sup>	650 mm	25.59"
Passage width max. <sup>[1]</sup>	920 mm	36.22"

### Special features\*

Wide passage lane<sup>[2]</sup> 921-1 050 mm 36.26 - 41.34"


Extra wide passage lane<sup>[3]</sup> 1 201-1 400 mm 47.28 - 55.12"

Heavy duty wing


Arc layout

Staggered / diagonal layout

Flag wing

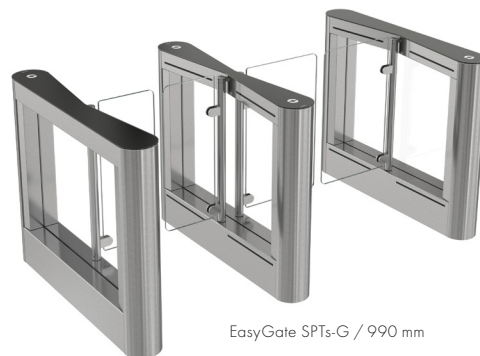


EasyGate SPTs-G / 990 mm

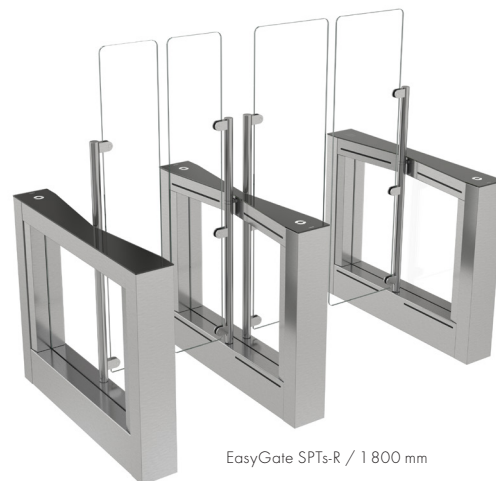

EasyGate SPTs-R / 1 800 mm

\* Optional [1] For 2 wings type [2] Dual opening mode [3] Cabinet length extended & Dual opening mode

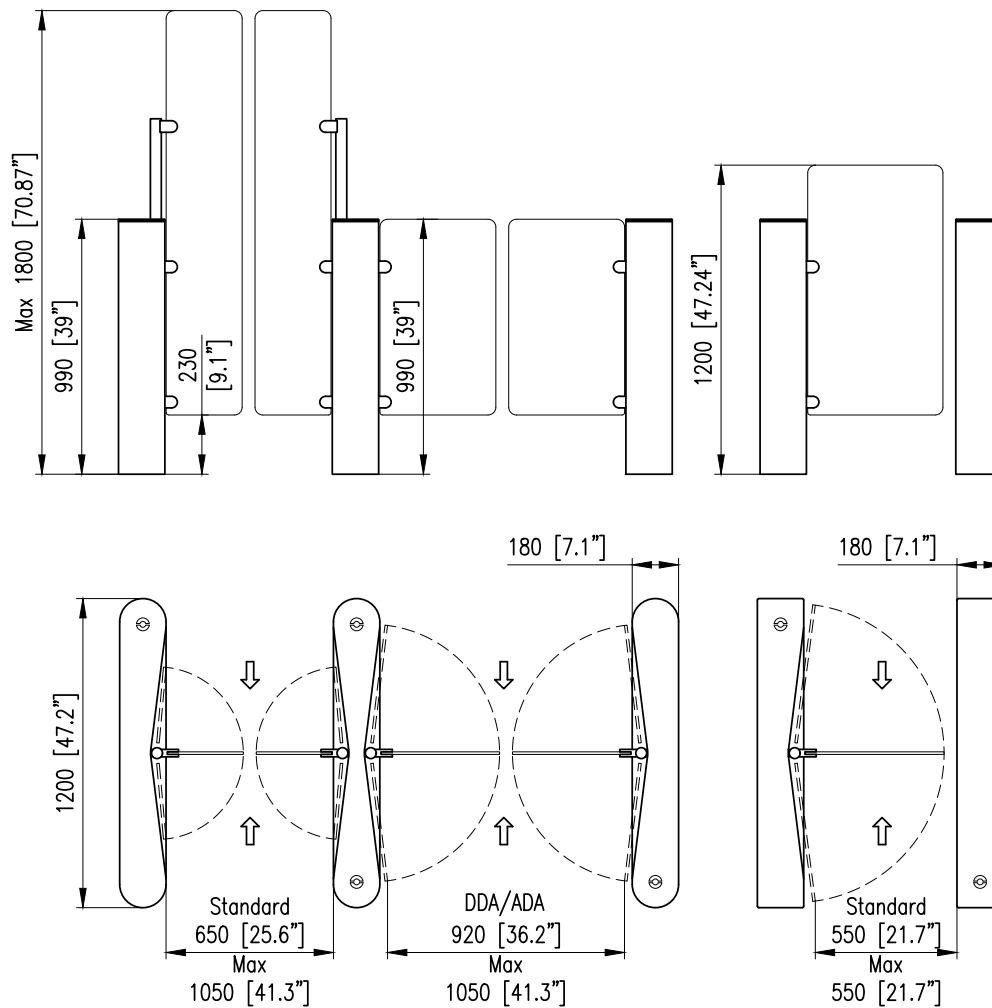

### Operating Environment

Indoor

### Drive Mechanism

Magnetic Direct Drive motor with external tooth brake  
MCBF 25,000,000

### Stand-by Power Consumption

6.1 W

### Emergency Mode

Open automatically in the exit direction  
Push through feature\*

### Optional Accessories

RFID reader bracket (flush mounted)  
Access Light / Lane Light / Edge Light / Wing Light / Passage Light  
WAV player  
Hinge capping  
Push through feature / Pressure sensing top  
RF remote control  
EasyTouch / TouchPanel / T-MON SW / RF remote control  
SuperCap (emergency power back-up)  
Alternative surface finishes / Optional top finishes  
Integration of LiftCall / Card collector / BarCode scanner  
Ramp LT

### Material and Colours

Covers	brushed stainless steel
Top Lid	black glass
Barriers	tempered glass barrier panels (10 mm / 0.39")
Side infill panel	tempered glass panels (6 mm / 0.24")

