




# EasyGate SPT-G / SPT-R

## Type

Swing technology  
 1 wing / 2 wings  
 SPT-G model – round front  
 SPT-R model – square front

## Safety & Security Detection

36 pairs of IR sensors  
 Adjustable Safety & Security levels  
 Tailgating / Cross over detection

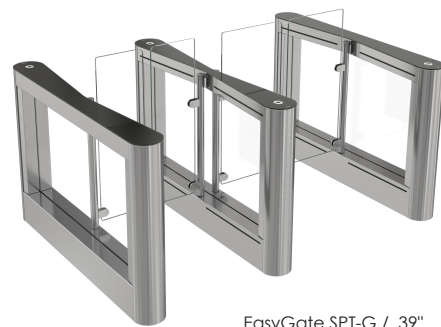

EasyGate SPT-G / 39" 990 mm

## Dimensions

Cabinet height	38.39"	975 mm
Cabinet length	47.24"	1 200 mm
Barrier height standard	38.98"	990 mm
Barrier height max.	70.87"	1 800 mm
Passage width standard[1]	25.59"	650 mm
Passage width max.[1]	36.22"	920 mm


## Special features\*

Wide passage lane[2]	36.22-41.34"	921-1050mm
Extra wide passage lane[3]	47.28-55.12"	1201-1400mm
Heavy duty wing		
Arc layout		
Staggered / diagonal layout		
Flag wing		



EasyGate SPT-R / 71" 1 800 mm

\* Optional [1] For 2 wings type [2] Dual opening mode [3] Cabinet length extended & Dual opening mode

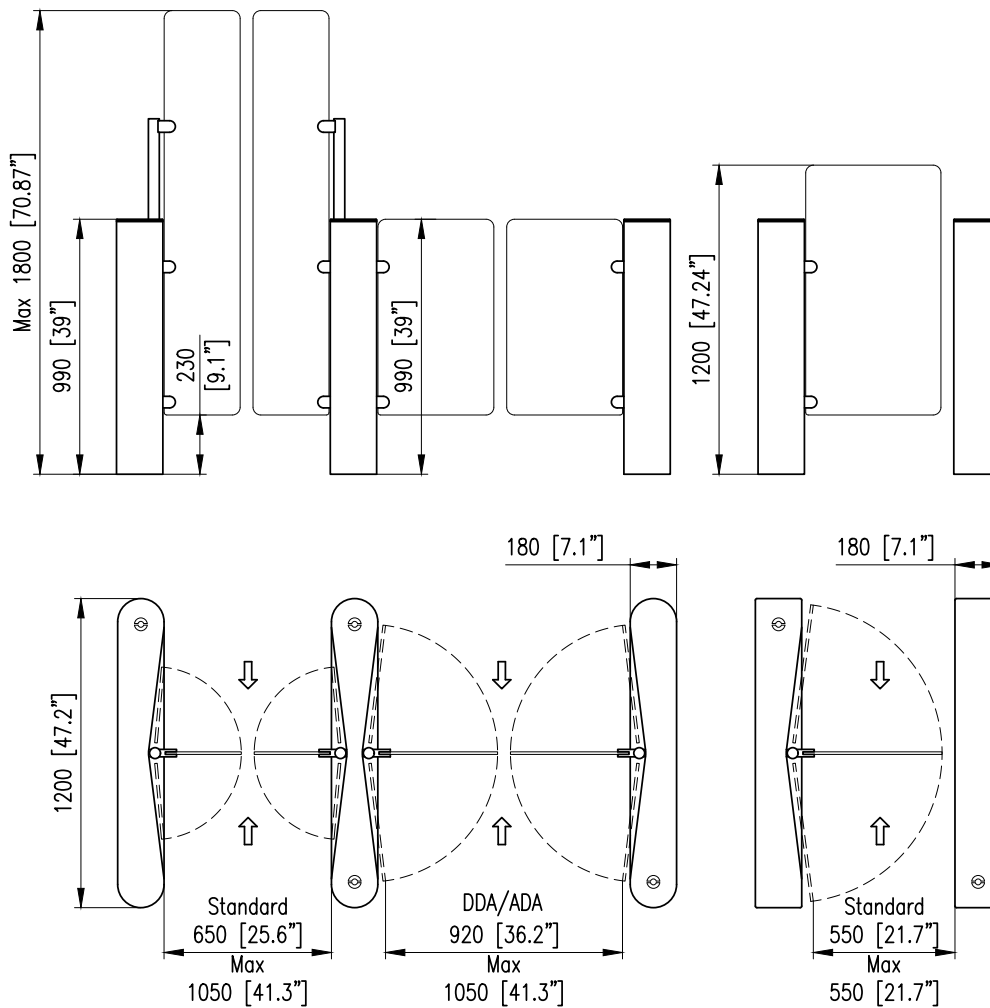

### Operating Environment

Indoor

### Drive Mechanism

Magnetic Direct Drive motor with external tooth brake

MCBF 25,000,000

### Power Supply

110 AC, 60 Hz

### Emergency Mode

Open automatically in the exit direction

Push through feature\*

### Optional Accessories

- RFID reader bracket (flush mounted)
- Access Light / Lane Light / Edge Light / Wing Light / Passage Light
- WAV player
- Hinge capping
- Push through feature
- Pressure sensing top
- RF remote control
- EasyTouch / TouchPanel / T-MON SW
- SuperCap (emergency power back-up)
- Alternative surface finishes / Optional top finishes
- Integration of LiftCall / Card collector / BarCode scanner
- Surface Mounting Bases

### Material and Colours

Covers	brushed stainless steel	
Top Lid	black glass	
Barriers	tempered glass barrier panels	(0.39"/10mm)
Side infill panel	tempered glass panels	(0.24"/6mm)

